FUSO Canter 515 Wide Cab Pantech

4X2 / WIDE CAB / DUONIC DCT

OUR SAFEST CANTER EVER WITH AEBS, LDWS AND ESP STANDARD FRP OR LIGHTWEIGHT HONEYCOMB BODY OPTIONS

GVM

4,495кс

<u>всм</u> 7,995ка Power/Torque

110кw / 370 мм

• Can be driven on a passenger car license



CANTER SPECIFICATIONS

MODEL


- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic AMT FEB21ER3SFBC-BP5 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic AMT FEB21ER3SFBC-BP6

WHEEL	GVM	GCM	
BASE	(optional)	(optio	
3400mm	4,495kg	7,995kg	
3400mm	4,495kg	7,995kg	

optional)

995kg

Engine	
Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Туре	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	110kW @ 2840~3500 rpm
Torque (DIN)	370Nm @ 1350~2840 rpm
Maximum Engine Speed	4100 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled,13.7L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	ADR 80/03 & EEV rated Enhanced Environmentally- Friendly Vehicle Euro 5



Fuel

Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Filter with Water Separator and Indicator Sensor
Notes	*Max Fill to approx 95% of capacity

Cooling

Fan Drive Radiator

Thermo modulated continuous control (Viscous) Corrugated Fin with Expansion Tank

Electrical		
Voltage	12V Negative Earth	
Battery Capacity	2x12V, 70Ah/5hr	
Battery Specification	115D31L x2	
Headlamp Type	Halogen	
Headlamp Capacity	2x55W/60W	
Body Builder Harness	Yes*	
Notes	*Standard from October 2021 build	

Clutch

Clutch Model Туре

Duonic Automated Manual (no clutch pedal) Dual Clutch (Wet Multi-plate)

Transmission		
Version	FUSO Duonic M038S6	
Type/Speeds	6 Speed Dual Clutch with Auto and Manual Modes	
Features	Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage	
Ratios	1st; 5.397	
	2nd: 3.788	
	3rd: 2.310	
	4th: 1.474	
	5th: 1.000 6th: 0.701	
	Rev. 5.397	
PTO Opening	LH Side	
Front Axle		
Axle Version	FUSO F200T	
Туре	Independent Front Suspension	
Capacity *	2300kg	
Notes	*See MAX LOADING for vehicle capacity.	
Front Suspension		
Туре	Double Wishbone Independent Front Suspension wit	
	Coil Springs and Shock Absorbers	
Rear Axle		
Туре	Full Floating Banjo Type	
Axle Version	FUSO R030T	
Capacity*	3800kg	
Ratio		
Notes	*See MAX LOADING for vehicle capacity.	
Rear Suspension		
Туре	Steel Suspension	
Details	Parabolic Leaf with Shock Absorbers	
Size Main Leaves	1100x70mm	
Max Loading		
Front	2180kg	
Rear	3800kg	
Total	4495kg	
Steering		
Туре	Rack & Pinion	
Steering Column	Tilt/Telescopic Adjustable	
Power Assist	Standard	
Brakes		
Туре	Hydraulic Dual Circuit with Front and Rear Discs	
Size Front	219x28mm	
Size Rear	219x28mm	
Features	ABS plus EBD (Electronic Brake Distribution)	
	Active Emergency Braking System (AEBS) Electronic Stability Program (ESP)	
	Exhaust Brake	
	Brake Priority System	
Park Brake	Electronic Brake Wear Sensors (From Aug 20 build) Transmission Mounted	



CANTER SPECIFICATIONS

MODEL

Tensile Strength

Standard Features

Active Safety Features

Cab Cooling & Heating

Airbag(s)

Cruise Control

Hill Start System

Accessory Power Driving

Storage

Chassis

Cab: External

- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic AMT FEB21ER3SFBC-BP5 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic AMT FEB21ER3SFBC-BP6

WHEE	
BASE	
3400mm	
3400mm	

GVM (optional) 4,495kg 4,495kg

GCM (optional) 7,995kg 7,995kg

Wheels & Tyres	
Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0x5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size All	185/85R16 111/109
Spare Tyre Carrier	Provided
Chassis	
Туре	Reinforced Tapered Channel
Size	188x60x4mm
Width	748mm

Instruments	
Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature
Colour Information Display	Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Lane Departure Warning Maintenance Reminder System Tripmeters

540Mpa

Multi-Media Package	
Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	7 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) USB & 3.5mm/AUX port
Reversing Camera	1 Reverse Camera fitted as standard
Compatible	Display can accept up to 4 additional cameras#
Optional Accessories (available at additional cost)	Rear Mounted Parking Sensor Kit High or Low Tyre Pressure Monitoring System
Notes	# Cameras available through spare parts

Far Side Passenger)

Fuso Multimedia Unit Keyless Central Locking Electric Windows Cup Holders 2 3 seats

Preconditioning Cab

Door Storage Pockets Dash Storage Tray (1 DIN)

Reverse Warning Buzzer

Coat Hooks

Audible Pickup

Yes

Yes

Anti-Slip Regulator (ASR) Electronic Stability Program (ESP) Lane Departure Warning System (LDWS)

Dual Air Bags and Seat Belt Pre-Tensioners (Driver &

ABS plus Electronic Brake force Distribution (EBD)

Advanced Emergency Braking (AEBS)

Air Conditioner / Heater / Demister 12V Accessory Power Outlet / Cigar Lighter

Dual Overhead Storage Pockets In-Dash Centre Document Storage

Front End-Outline Marker Lamps Door Side Impact Beams

Factory Reverse Camera with Infrared Display and

Cab Features		
Cab Structure	ECE-R29 European Cab Strength Approved	
Mounting	Hydroelastic 4 Point	
Additional Engine Access	Removable Engine Access Panel	
Colour	Natural White	
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles	
Rear Vision Mirrors	2 x External Convex (ECE 46) - Heated	
Seating Capacity	3	
Seat Belts	Lap Sash Belts for Outside Seating Positions Lap Belt for Centre Seat Driver Seat Belt Warning (From Aug 20 build)	
Seat (driver)	Suspended with Weight Adjustment, LH Arm Rest and Lumbar Support	
Seats (passenger)	Flat Folding, 2 Passenger Bench	
Service Intervals		
Interval*	30,000km or 12 Months (whichever occurs first)	
Warranty		
Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)	
Basic/Powertrain Cab Perforation/Anti Corrosion	5 Years or 200,000kms (whichever occurs first) 5 Years	
Cab Perforation/Anti		
Cab Perforation/Anti Corrosion	5 Years * based on normal operating conditions and may be	
Cab Perforation/Anti Corrosion Notes	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions.	
Cab Perforation/Anti Corrosion Notes	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions.	
Cab Perforation/Anti Corrosion Notes Body	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions.	
Cab Perforation/Anti Corrosion Notes Body Performance Turning Circle (kerb to kerb	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions. 1 Year/Unlimited kms	
Cab Perforation/Anti Corrosion Notes Body Performance Turning Circle (kerb to kerb - metres) Road Speed (km/h) at Max	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions. 1 Year/Unlimited kms 11.0	
Cab Perforation/Anti Corrosion Notes Body Performance Turning Circle (kerb to kerb - metres) Road Speed (km/h) at Max Engine Speed Engine Speed (rpm) at	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions. 1 Year/Unlimited kms 11.0 137	
Cab Perforation/Anti Corrosion Notes Body Performance Turning Circle (kerb to kerb - metres) Road Speed (km/h) at Max Engine Speed Engine Speed (rpm) at 100km/hr (top gear) Gradeability at Rated GVM	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions. 1 Year/Unlimited kms 11.0 137 2346	
Cab Perforation/Anti Corrosion Notes Body Performance Turning Circle (kerb to kerb - metres) Road Speed (km/h) at Max Engine Speed Engine Speed Engine Speed (rpm) at 100km/hr (top gear) Gradeability at Rated GVM (theoretical)*	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions. 1 Year/Unlimited kms 11.0 137 2346 45% *This is theoretical performance only. Actual	
Cab Perforation/Anti Corrosion Notes Body Performance Turning Circle (kerb to kerb - metres) Road Speed (km/h) at Max Engine Speed Engine Speed Engine Speed (rpm) at 100km/hr (top gear) Gradeability at Rated GVM (theoretical)*	5 Years * based on normal operating conditions and may be reduced when operating under severe conditions. 1 Year/Unlimited kms 11.0 137 2346 45% *This is theoretical performance only. Actual	

Front*	<mark>A</mark> 1585kg	<mark>В</mark> ТВА	
Rear*	A 1885kg	<mark>B</mark> TBA	
Total*	A 3470kg	B TBA	
Notes		cludes oil and water but excludes uel. Weights provided are subject +/-)	

Dimensions mm		
WFF (Width Front Fender) (mm)	1995	
WRA (Width Rear Axle) (mm)	1929	
WRT (Width Rear Track) (mm)	1495	
Width Frame (mm)	748	

Body Builder's Notes



CANTER SPECIFICATIONS

MODEL


- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic AMT FEB21ER3SFBC-BP5
- 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic AMT FEB21ER3SFBC-BP6

WHEEL BASE 3400mm 3400mm

GVM (optional) 4,495kg 4,495kg

GCM (optional) 7,995kg 7,995kg

Built Ready			
Features	Walls • Double Rear Doors with Three Hinges kerb side opens first • Fixed Grab Handles on Rear Pillars • Rear under-run bar to suit tailgate with steps and light protection frames • Tailgate: DH-RP.10 750kgs Capacity Dhollandia Tuckaway Tailgate	One Piece Aluminum Roof Sheet External Stainless Polished Extrusions Smm Steel Chequerplate Floor Exposed Chequer Up 190mm High Internal Kick Panels Internal Light with in cab switch Internal Square Tube Tie Rails fixed to Panel Walls Double Rear Doors with Three Hinges kerb side opens first Fixed Grab Handles	3111
Length (mm)	4320		
Width (mm)	2185		
Height (mm)	2135		
Overall Unit Length (mm)	6335		

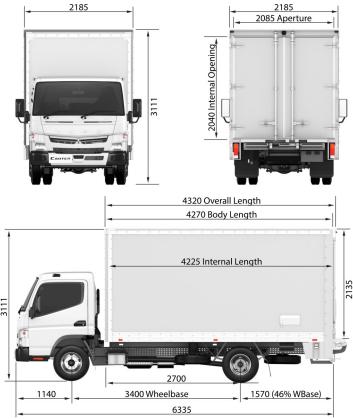



Call 1800 033 557

or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Part Number TSX30A-SSV4. Valid from 05-Nov-21.

